

## Kawasaki Heavy Industries, Ltd

### Robot Business Division

#### Tokyo Head Office/Robot Division

1-14-5, Kaigan, Minato-ku, Tokyo 105-8315, Japan  
 Phone: +81-3-3435-2501 Fax: +81-3-3437-9880

#### Akashi Works/Robot Division

1-1, Kawasaki-cho, Akashi, Hyogo 673-8666, Japan  
 Phone: +81-78-921-2946 Fax: +81-78-923-6548

#### Nishi-Kobe Works/Robot Division

234, Matsumoto, Hasetani-cho, Nishi-ku, Kobe, Hyogo 651-2239, Japan  
 Phone: +81-78-915-8136 Fax: +81-78-915-8274

### Global Network

#### Kawasaki Robotics (USA), Inc.

28140 Lakeview Drive, Wixom, MI 48393, U.S.A.  
 Phone: +1-248-446-4100 Fax: +1-248-446-4200

#### Kawasaki Robotics (UK) Ltd.

Unit 4 Easter Court, Europa Boulevard, Westbrook  
 Warrington Cheshire, WA5 7ZB, United Kingdom  
 Phone: +44-1925-71-3000 Fax: +44-1925-71-3001

#### Kawasaki Robotics GmbH

Im Taubental 32, 41468 Neuss, Germany  
 Phone: +49-2131-34260 Fax: +49-2131-3426-22

#### Kawasaki Robotics Korea, Ltd.

NO. 6-10, 14th floor, 1dong, 135, Gasan digital 2-ro,  
 Geumcheon-gu, Seoul, Republic of Korea  
 Phone: +82-32-821-6941 Fax: +82-32-821-6947

#### Kawasaki Robotics (Tianjin) Co., Ltd.

1-2/F, Building 6, No.19 Xinhuan Road, TEDA, China  
 Phone: +86-22-5983-1888 Fax: +86-22-5983-1889

#### Taiwan kawasaki Robot Center

3F, No.31, Ln.216, Gongyuan Rd.,Hsinchu City  
 30069, Taiwan(R.O.C)  
 Phone: +886-3-562-0518

#### Kawasaki Motors Enterprise (Thailand) Co., Ltd.

(Rayong Robot Center)  
 119/10 Moo 4 T.Pluaek Daeng, A.Pluaek Daeng, Rayong 21140  
 Thailand  
 Phone: +66-38-955-040-58 Fax: +66-38-955-145

#### Singapore Kawasaki Robot Center

100G Pasir Panjang Road #06-10  
 Singapore 118523  
 Phone: +65-6513-3145

#### Kawasaki Robotics India Pvt. Ltd.

1/5, Village-Khandsa, Khasra No. 1364,599/2/2/1,  
 Hero Honda Chowk,Gurgaon-122001, Haryana  
 Phone: +91-124-608-5500

**Kawasaki Robotics website**  
<https://kawasakirobotics.com/>



# Kawasaki Robot

## Palletizing Robots

Small-to-medium robots  
 up to 80kg payload

Large robots  
 up to 300kg payload

Extra large robots  
 up to 1,500kg payload

Dual-arm Collaborative robots

Explosion-proof painting robots

Sealing robots

Arc welding robots

**Palletizing robots**

Medical & pharmaceutical robots

Picking robots

Wafer transfer robots

Self-Propelled Robot



#### CAUTIONS TO BE TAKEN TO ENSURE SAFETY

- For those persons involved with the operation / service of your system, including Kawasaki Robot, they must strictly observe all safety regulations at all times. They should carefully read the Manuals and other related safety documents.
- Products described in this catalogue are general industrial robots. Therefore, if a customer wishes to use the Robot for special purposes, which might endanger operators or if the Robot has any problems, please contact us. We will be pleased to help you.
- Be careful as Photographs illustrated in this catalogue are frequently taken after removing safety fences and other safety devices stipulated in the safety regulations from the Robot operation system.



# Palletizing Robots

Kawasaki offers a wide range of palletizing robots from 80 to 700 kg payload. The full product lineup delivers high throughput palletizing and solutions for labor shortage in the logistic industry and in-house factory logistics.

## CP series

The CP series covers 180, 300, 500 and 700 kg payload. These four models achieve a high productivity of palletizing in diverse industries.



CP180L/300L



CP500L



CP700L

## RD series

The RD series palletizing robot has the payload capacity of 80 kg. Thanks to its compact arm design, it can be installed in a confined space.



RD080N

## CP/RD series

[Applications]

Palletizing


- Features
  - The full lineup covers diverse weights and sizes of workpieces.
  - The industry-leading speed achieves an efficient palletizing system.
  - The Cubic-S (an optional safety monitoring function) achieves safe operations of the system.

### CP180L/300L

#### Standard Specifications

		CP180L		CP300L	
Type		Articulated robot			
Degree of freedom (axes)		4			
Max. reach (mm)		3,255			
Position repeatability*1 (mm)		±0.5			
Motion range (°)	Arm rotation (JT1)	±160			
	Arm out-in (JT2)	+95 - -46			
	Arm up-down (JT3)	+15 - -110			
	Wrist swivel (JT4)	±360			
Payload (kg)		130	180	250	300
Max. speed*2 (°/s)	Arm rotation (JT1)	140	130	115	100
	Arm out-in (JT2)	125	120	100	90
	Arm up-down (JT3)	130	125	100	90
	Wrist swivel (JT4)	400	330	250	220
Allowable moment of inertia (kg·m²)	Wrist swivel (JT4)	50	85	100	140
Mass (kg)		1,600			
Mounting		Floor			
Installation environment	Ambient temperature (°C)	0 - 45			
	Relative humidity (%)	35 - 85 (No dew, nor frost allowed)			
Controller/Power requirements		F03/12kVA			

\*1: Conforms to ISO9283  
 \*2: The maximum speed varies depending on the load setting.

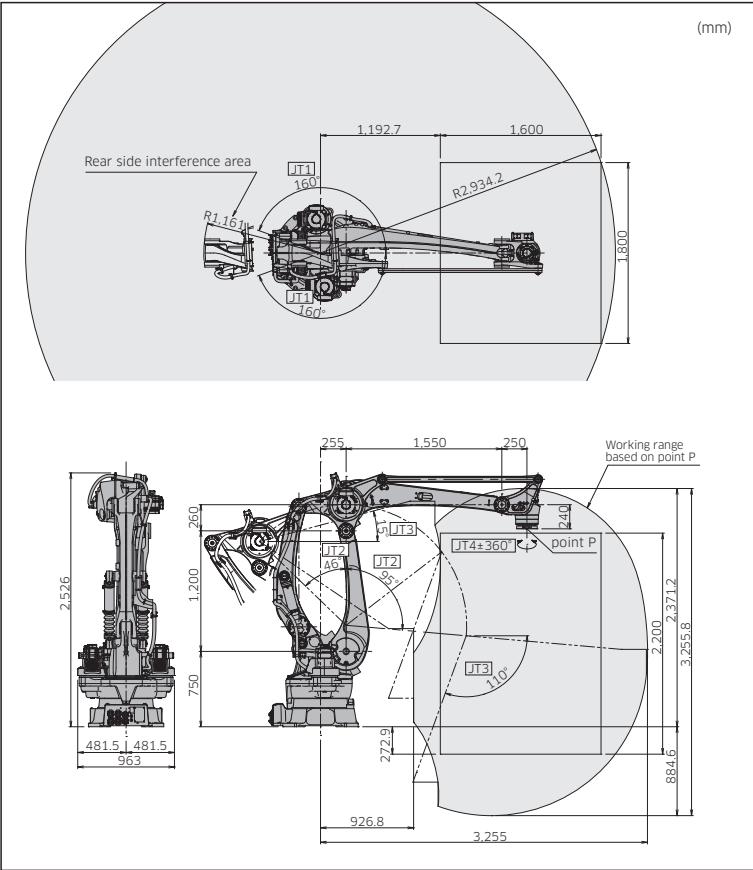


### CP500L

#### Standard Specifications

		Articulated robot	
Degree of freedom (axes)		4	
Payload (kg)		500	
Max. reach (mm)		3,255	
Position repeatability*1 (mm)		±0.5	
Motion range (°)	Arm rotation (JT1)	±160	
	Arm out-in (JT2)	+95 - -46	
	Arm up-down (JT3)	+15 - -110	
	Wrist swivel (JT4)	±360	
Max. speed (°/s)	Arm rotation (JT1)	85	
	Arm out-in (JT2)	80	
	Arm up-down (JT3)	80	
	Wrist swivel (JT4)	180	
Allowable moment of inertia (kg·m²)		Wrist swivel (JT4) 250	
Mass (kg)		1,650	
Mounting		Floor	
Installation environment	Ambient temperature (°C)	0 - 45	
	Relative humidity (%)	35 - 85 (No dew, nor frost allowed)	
Controller/Power requirements		F03/12kVA	

\*1: Conforms to ISO9283

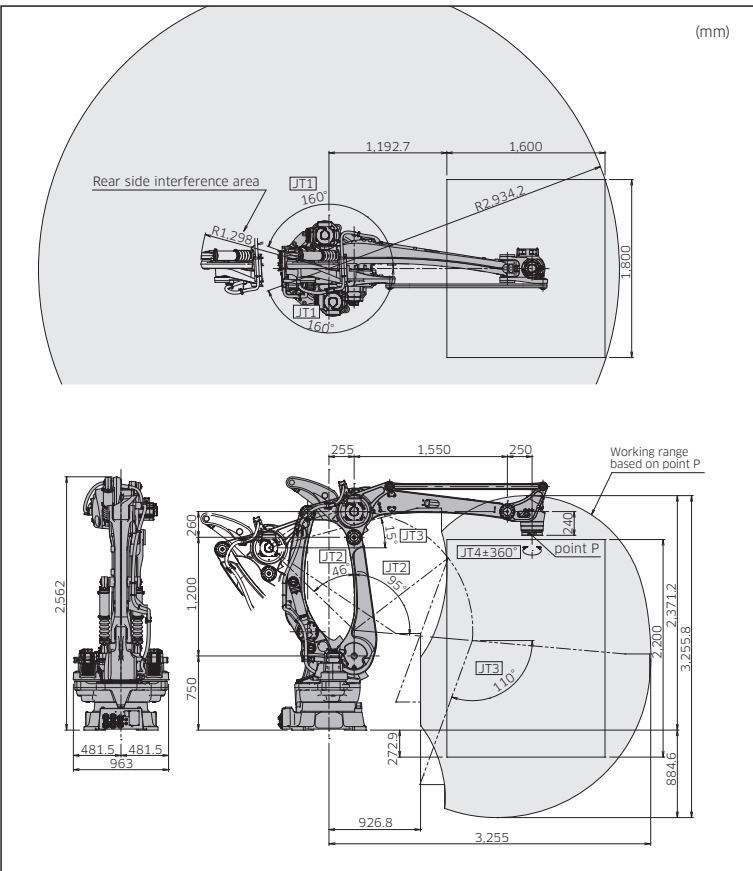


## CP700L

## Standard Specifications

Type	Articulated robot	
Degree of freedom (axes)	4	
Payload (kg)	700	
Max. reach (mm)	3,255	
Position repeatability*1 (mm)	±0.5	
Motion range (°)	Arm rotation (JT1)	±160
	Arm out-in (JT2)	+95 - -46
	Arm up-down (JT3)	+15 - -110
	Wrist swivel (JT4)	±360
Max. speed (°/s)	Arm rotation (JT1)	75
	Arm out-in (JT2)	65
	Arm up-down (JT3)	65
	Wrist swivel (JT4)	170
Allowable moment of inertia (kg·m <sup>2</sup> )	Wrist swivel (JT4)	500
Mass (kg)	1,650	
Mounting	Floor	
Installation environment	Ambient temperature (°C)	0 - 45
	Relative humidity (%)	35 - 85 (No dew, nor frost allowed)
Controller/Power requirements	F03/12kVA	

\*1: Conforms to ISO9283

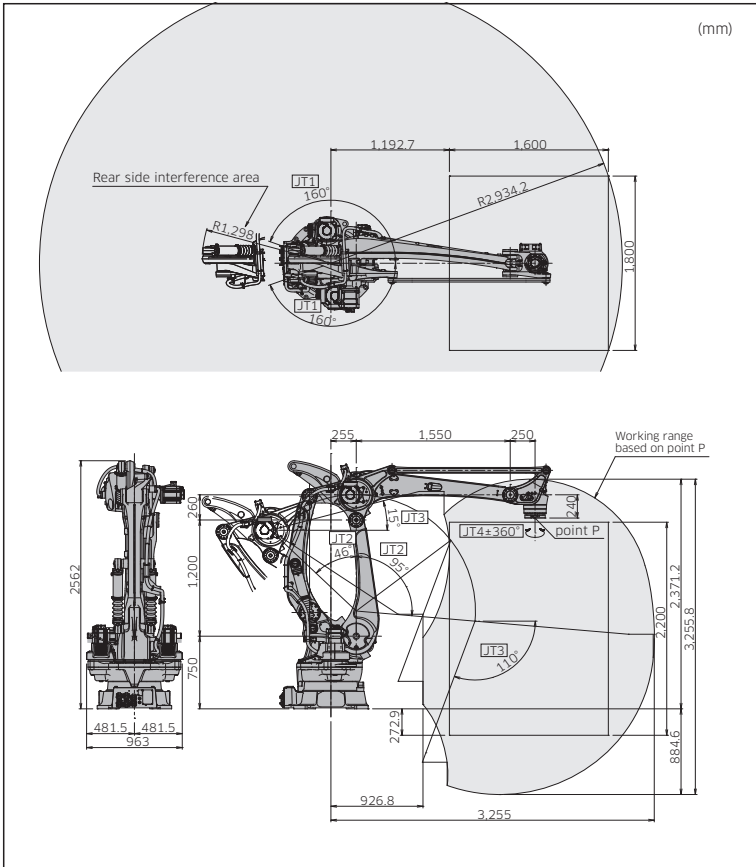


## RD080N

## Standard Specifications

Type		Articulated robot
Degree of freedom (axes)		5
Payload (kg)		80
Max. reach (mm)		2,100
Position repeatability <sup>*1</sup> (mm)		±0.07
Motion range (°)	Arm rotation (JT1)	±180
	Arm out-in (JT2)	+140 - -105
	Arm up-down (JT3)	+40 - -205
	Wrist swivel (JT4)	±360
	Wrist compensation (JT5)	±10 <sup>*2</sup>
Max. speed (°/s)	Arm rotation (JT1)	180
	Arm out-in (JT2)	180
	Arm up-down (JT3)	175
	Wrist swivel (JT4)	360
Allowable moment of inertia (kg·m <sup>2</sup> )	Wrist swivel (JT4)	13.7
Mass (kg)		540
Mounting		Floor
Installation environment	Ambient temperature (°C)	0 - 45
	Relative humidity (%)	35 - 85 (No dew, nor frost allowed)
Controller/Power requirements		F03/12kVA

\*1: Conforms to ISO9283

\*2: Operating angle of the JT5 is  $\pm 10$  degrees perpendicular to the ground.

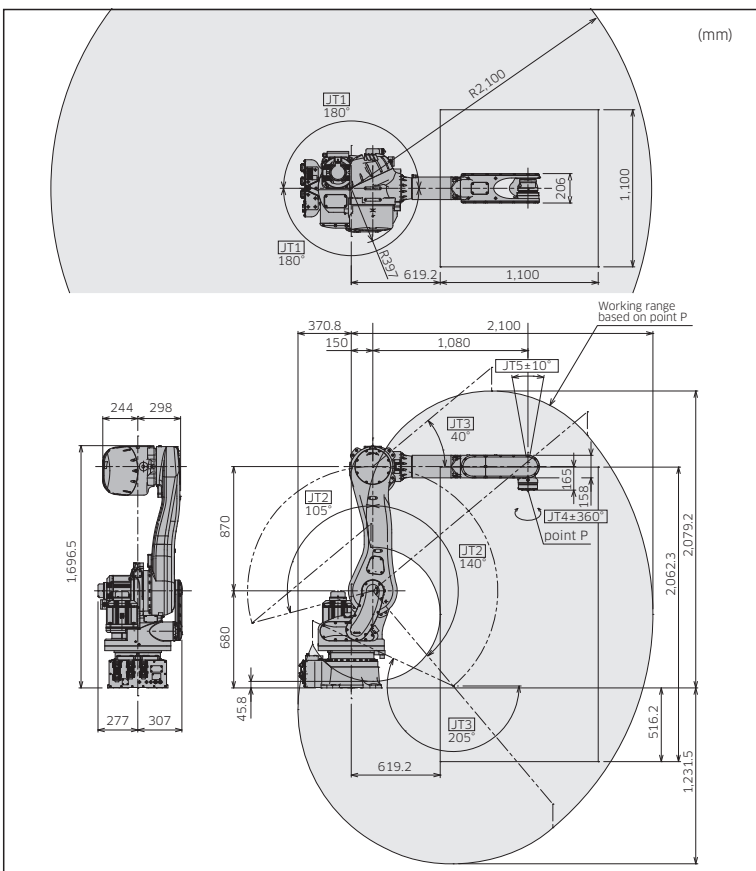

F03

## Features

- Dimensions and weight have been reduced from its previous E-controller.
- This universal controller has common specifications that can be used globally. (An optional transformer unit is necessary in the region where the power supply and safety standard differ.)




## Standard Specifications


Dimensions (mm)		W420×D530×H278
Type		Enclosed type, indirect cooling system
Controlled (axes)		5
Memory capacity (MB)		16
I/O signals	External operation	Motor power off, Hold
	Input (Channels)	32
	Output (Channels)	32
Cable length	Teach pendant (m)	5
	Robot-controller (m)	5
Mass (kg)		30
Power requirements		AC200V - AC220V ±10%, 50/60Hz, 3Φ AC200V - AC230V ±10%, 50/60Hz, 1Φ
		Max. 12kVA
Installation environment	Ambient temperature (°C)	0 - 45
	Relative humidity (%)	35 - 85 (No dew, nor frost allowed)
Teach pendant		Color LCD display with touch-panel, E-Stop switch, Teach lock switch, Enable switch
Operation panel		E-stop switch, teach/repeat switch

### External view and dimensions


## F03

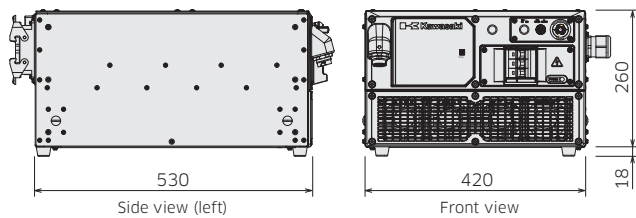

**Transformer unit** \*Option

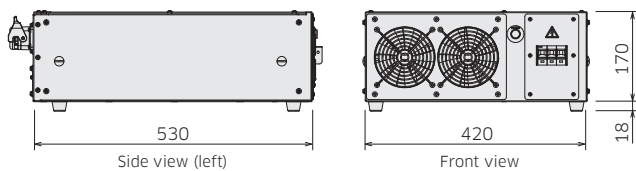

## System configuration

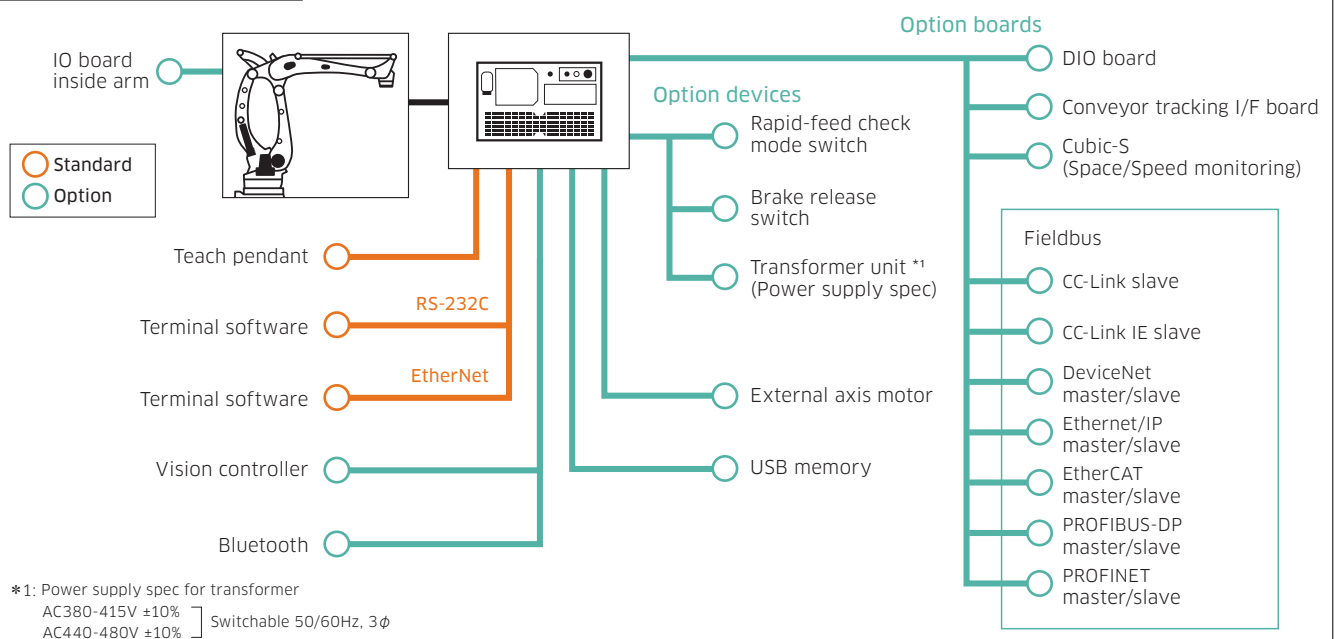



# Features of Kawasaki's Palletizing Robots

## Palletizing Robot Performance

Kawasaki's palletizing robots typically achieve a processing capacity of approximately 1,200 units per hour when handling one box or one bag at a time (varies depending on robot model). Under certain conditions, they can process up to 1,800 units per hour. When handling multiple boxes or bags simultaneously (e.g., palletizing an entire layer of cardboard boxes), the processing capacity increases further, enabling more efficient operations.

### CP series

Long reach, capable of handling up to 6 pallets and 1,800 units per hour



### RD series

Compact footprint, suitable for 2-3 pallets and 800 units per hour



※The above processing capacities are reference values and may vary depending on the robot model, shape and weight of the items, transport conditions, and surrounding equipment configuration.

※The maximum processing capacity listed is based on optimal conditions and should be reviewed individually for actual implementation.

※For pallet heights exceeding the standard 2.2 meters, CP series robots are recommended.

## Applicable Products for Palletizing

Kawasaki's palletizing robots support automation of palletizing tasks for a wide variety of product shapes and sizes, including cardboard boxes, bags, and drums.They enable simultaneous handling of multiple items and mixed palletizing of different product types, contributing to flexible and efficient logistics operations.



Boxes



Bags



Cans



Wood materials

※In addition to the above, the robots can handle many other shapes and sizes of products.

### Palletizing two flour bags simultaneously



Example Applications  
1



### Palletizing mixed product types



Example Applications  
2




# Robot programming support software

neoROSET is a PC-based programming support tool developed by Kawasaki that enables intuitive robot programming and accurate simulation.By performing offline verification in advance, it helps reduce risks associated with robot system implementation and shortens setup time significantly.




## Key Features of neoROSET

- Dramatically reduces teaching time
- Backward compatibility with legacy software K-ROSET
- Supports import of various 3D CAD formats
- Simple and intuitive operation

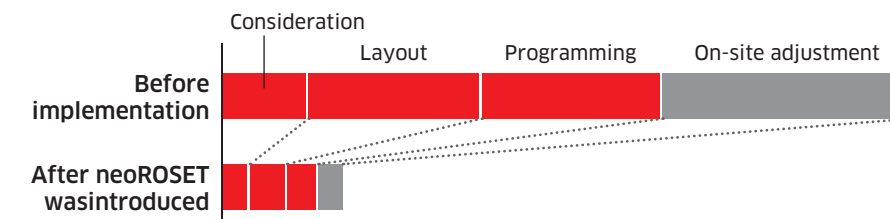

By using neoROSET, the time required for conventional offline teaching and adjustment can be reduced to a fraction or even up to one-tenth.

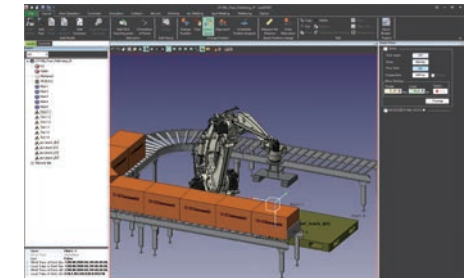

Its intuitive graphical user interface allows users to visually create robot programs, even without specialized programming knowledge.

## Palletizing-Specific Optional Functions

Previously, defining palletizing patterns and handling product variations required complex layout design and programming, often leading to errors such as collisions or misplacements.Training and operation at the site were also challenging.Kawasaki's neoROSET Palletizing Function simplifies this process, allowing anyone to easily configure palletizing settings. It supports smooth and efficient implementation of palletizing robots.

※This function requires an additional optional license in addition to the standard neoROSET license.


## 6-Step Setup for Accurate and Efficient Palletizing

### 1. Select robot and material-hand




Automatically applies settings for Kawasaki R, B, Z, and M series robots, considering model-specific motion characteristics and constraints.

### 2. Choose layout pattern

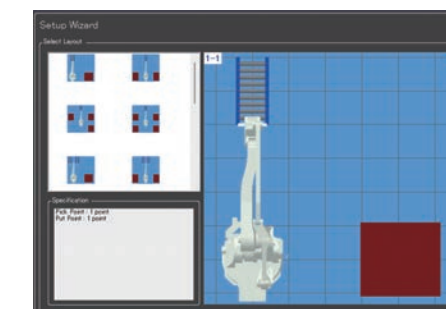


Multiple layout templates are available. Simply selecting one applies the optimal configuration, significantly reducing design time.

### 3. Set workpiece and pallet dimensions

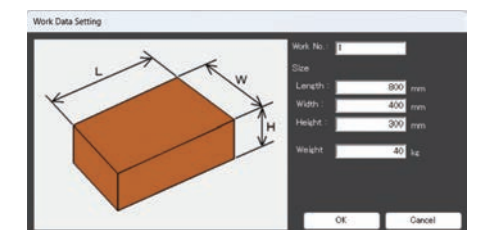


Supports various shapes such as boxes and bags. Entering dimensions automatically defines stacking conditions (height, spacing, stability, etc.).

### 4. Automatically generate palletizing positions

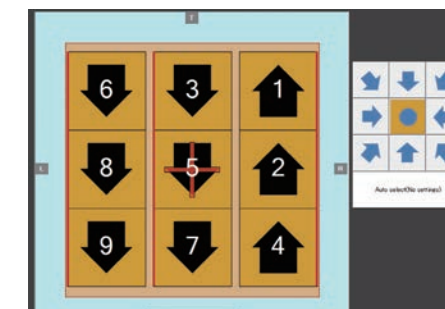


Choose from over 100 built-in patterns. Positions are generated automatically, enabling high-precision setup even without specialized knowledge.

### 5. Load positions into the robot

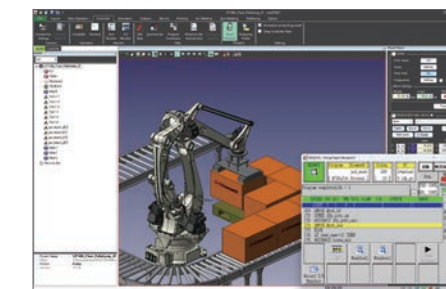

Automatically generated position data is transferred to the robot, preventing manual input errors and enabling accurate cycle time analysis.

### 6. Execute the program

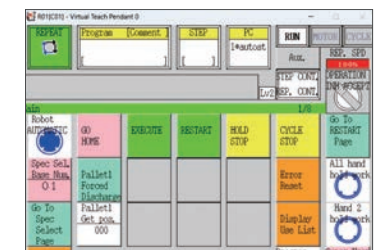

Use the virtual teach pendant (TP) for intuitive operation. Product types and pallet numbers can be set and simulated. Standard signal assignments for interlocks between upper-level controllers and the robot are also available, facilitating on-site deployment.