



Standard Specifications

BT200L-B00x

1st ed. 17-Feb-15
3rd ed. 17-Nov-20

Kawasaki Heavy Industries, Ltd.
Robot Business Division


Specification number : 90151-0035DEC

Materials and specifications are subject to change without notice.



Robot specifications

1. Model	BT200L-B																						
2. Type	Articulated robot																						
3. Degree of freedom	6 axes (Option 7 axes)																						
4. Max. payload	200 kg																						
5. Max. reach	3,151 mm																						
6. Position repeatability	±0.08 mm (wrist flange surface) conforms to ISO 9283																						
7. Axis specification	<table border="1"> <thead> <tr> <th>Operating axis</th><th>Motion range</th><th>Max. speed</th></tr> </thead> <tbody> <tr> <td>Arm rotation (JT1)</td><td>±160 °</td><td>105 ° /s</td></tr> <tr> <td>Arm out-in (JT2)</td><td>+80 ° - -130 °</td><td>85 ° /s</td></tr> <tr> <td>Arm up-down (JT3)</td><td>+90 ° - -75 °</td><td>100 ° /s</td></tr> <tr> <td>Wrist swivel (JT4)</td><td>±210 °</td><td>120 ° /s</td></tr> <tr> <td>Wrist bend (JT5)</td><td>±125 °</td><td>120 ° /s</td></tr> <tr> <td>Wrist twist (JT6)</td><td>±210 °</td><td>200 ° /s</td></tr> </tbody> </table>		Operating axis	Motion range	Max. speed	Arm rotation (JT1)	±160 °	105 ° /s	Arm out-in (JT2)	+80 ° - -130 °	85 ° /s	Arm up-down (JT3)	+90 ° - -75 °	100 ° /s	Wrist swivel (JT4)	±210 °	120 ° /s	Wrist bend (JT5)	±125 °	120 ° /s	Wrist twist (JT6)	±210 °	200 ° /s
Operating axis	Motion range	Max. speed																					
Arm rotation (JT1)	±160 °	105 ° /s																					
Arm out-in (JT2)	+80 ° - -130 °	85 ° /s																					
Arm up-down (JT3)	+90 ° - -75 °	100 ° /s																					
Wrist swivel (JT4)	±210 °	120 ° /s																					
Wrist bend (JT5)	±125 °	120 ° /s																					
Wrist twist (JT6)	±210 °	200 ° /s																					
8. Load capacity of wrist	<table border="1"> <thead> <tr> <th></th><th>Max. torque</th><th>Moment of inertia*</th></tr> </thead> <tbody> <tr> <td>JT4</td><td>1,334 N·m</td><td>199.8 kg·m²</td></tr> <tr> <td>JT5</td><td>1,334 N·m</td><td>199.8 kg·m²</td></tr> <tr> <td>JT6</td><td>588 N·m</td><td>154.9 kg·m²</td></tr> </tbody> </table> Note* Each value in this table shows allowable moment of inertia of JT4/JT5/JT6 when max. allowed torque is applied to each axis. If more detailed data is required for your application, please contact Kawasaki.			Max. torque	Moment of inertia*	JT4	1,334 N·m	199.8 kg·m ²	JT5	1,334 N·m	199.8 kg·m ²	JT6	588 N·m	154.9 kg·m ²									
	Max. torque	Moment of inertia*																					
JT4	1,334 N·m	199.8 kg·m ²																					
JT5	1,334 N·m	199.8 kg·m ²																					
JT6	588 N·m	154.9 kg·m ²																					
9. Mass	1,100 kg (without options)																						
10. Mounting	Shelf mounting																						
11. Installation Environment	Ambient Temperature: 0 - 45 °C																						
	Relative Humidity: 35 - 85 % (with no dew condensation)																						
12. Color	Munsell 10GY9/1 equivalent																						
13. Degree of protection	Wrist: IP67 equivalent, Arm: IP54 equivalent																						
14. Dressing	Cable length between flange and tool is 1.5m. Consult Kawasaki when non-standard dressing will be applied.																						
15. Options	Mechanical stopper	Adjustable stoppers JT1/JT2/JT3																					
	Adapter bracket	between flange and tool																					

Consult Kawasaki about maintenance parts and spare parts.

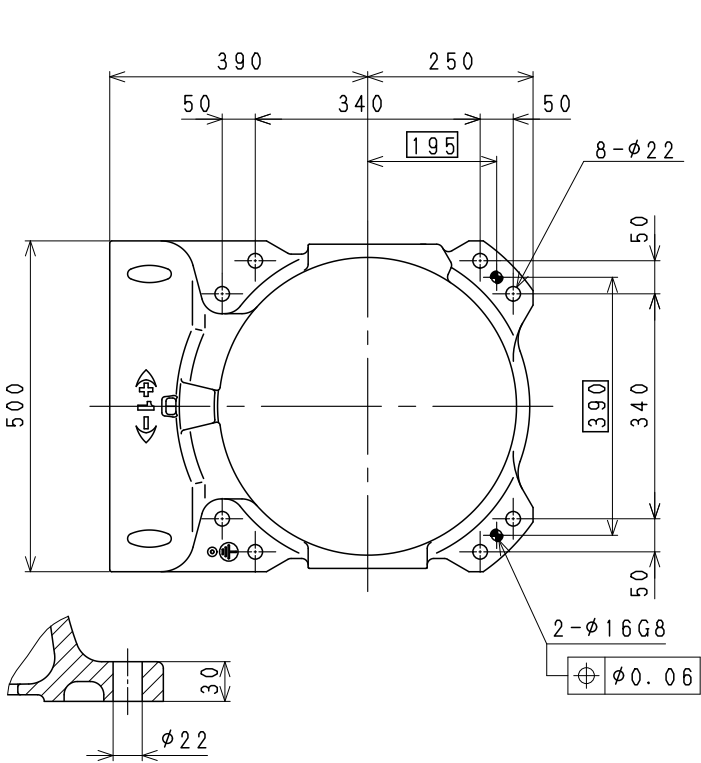


Installation Dimensions

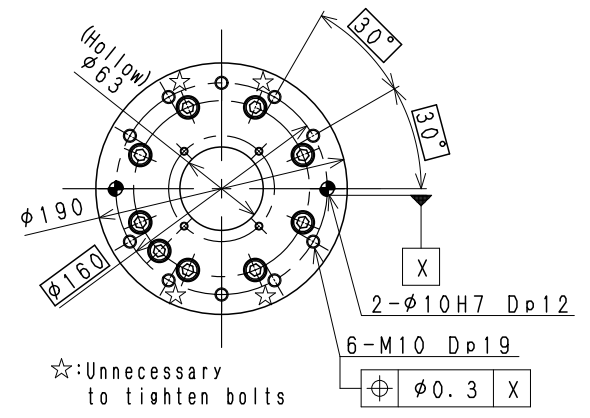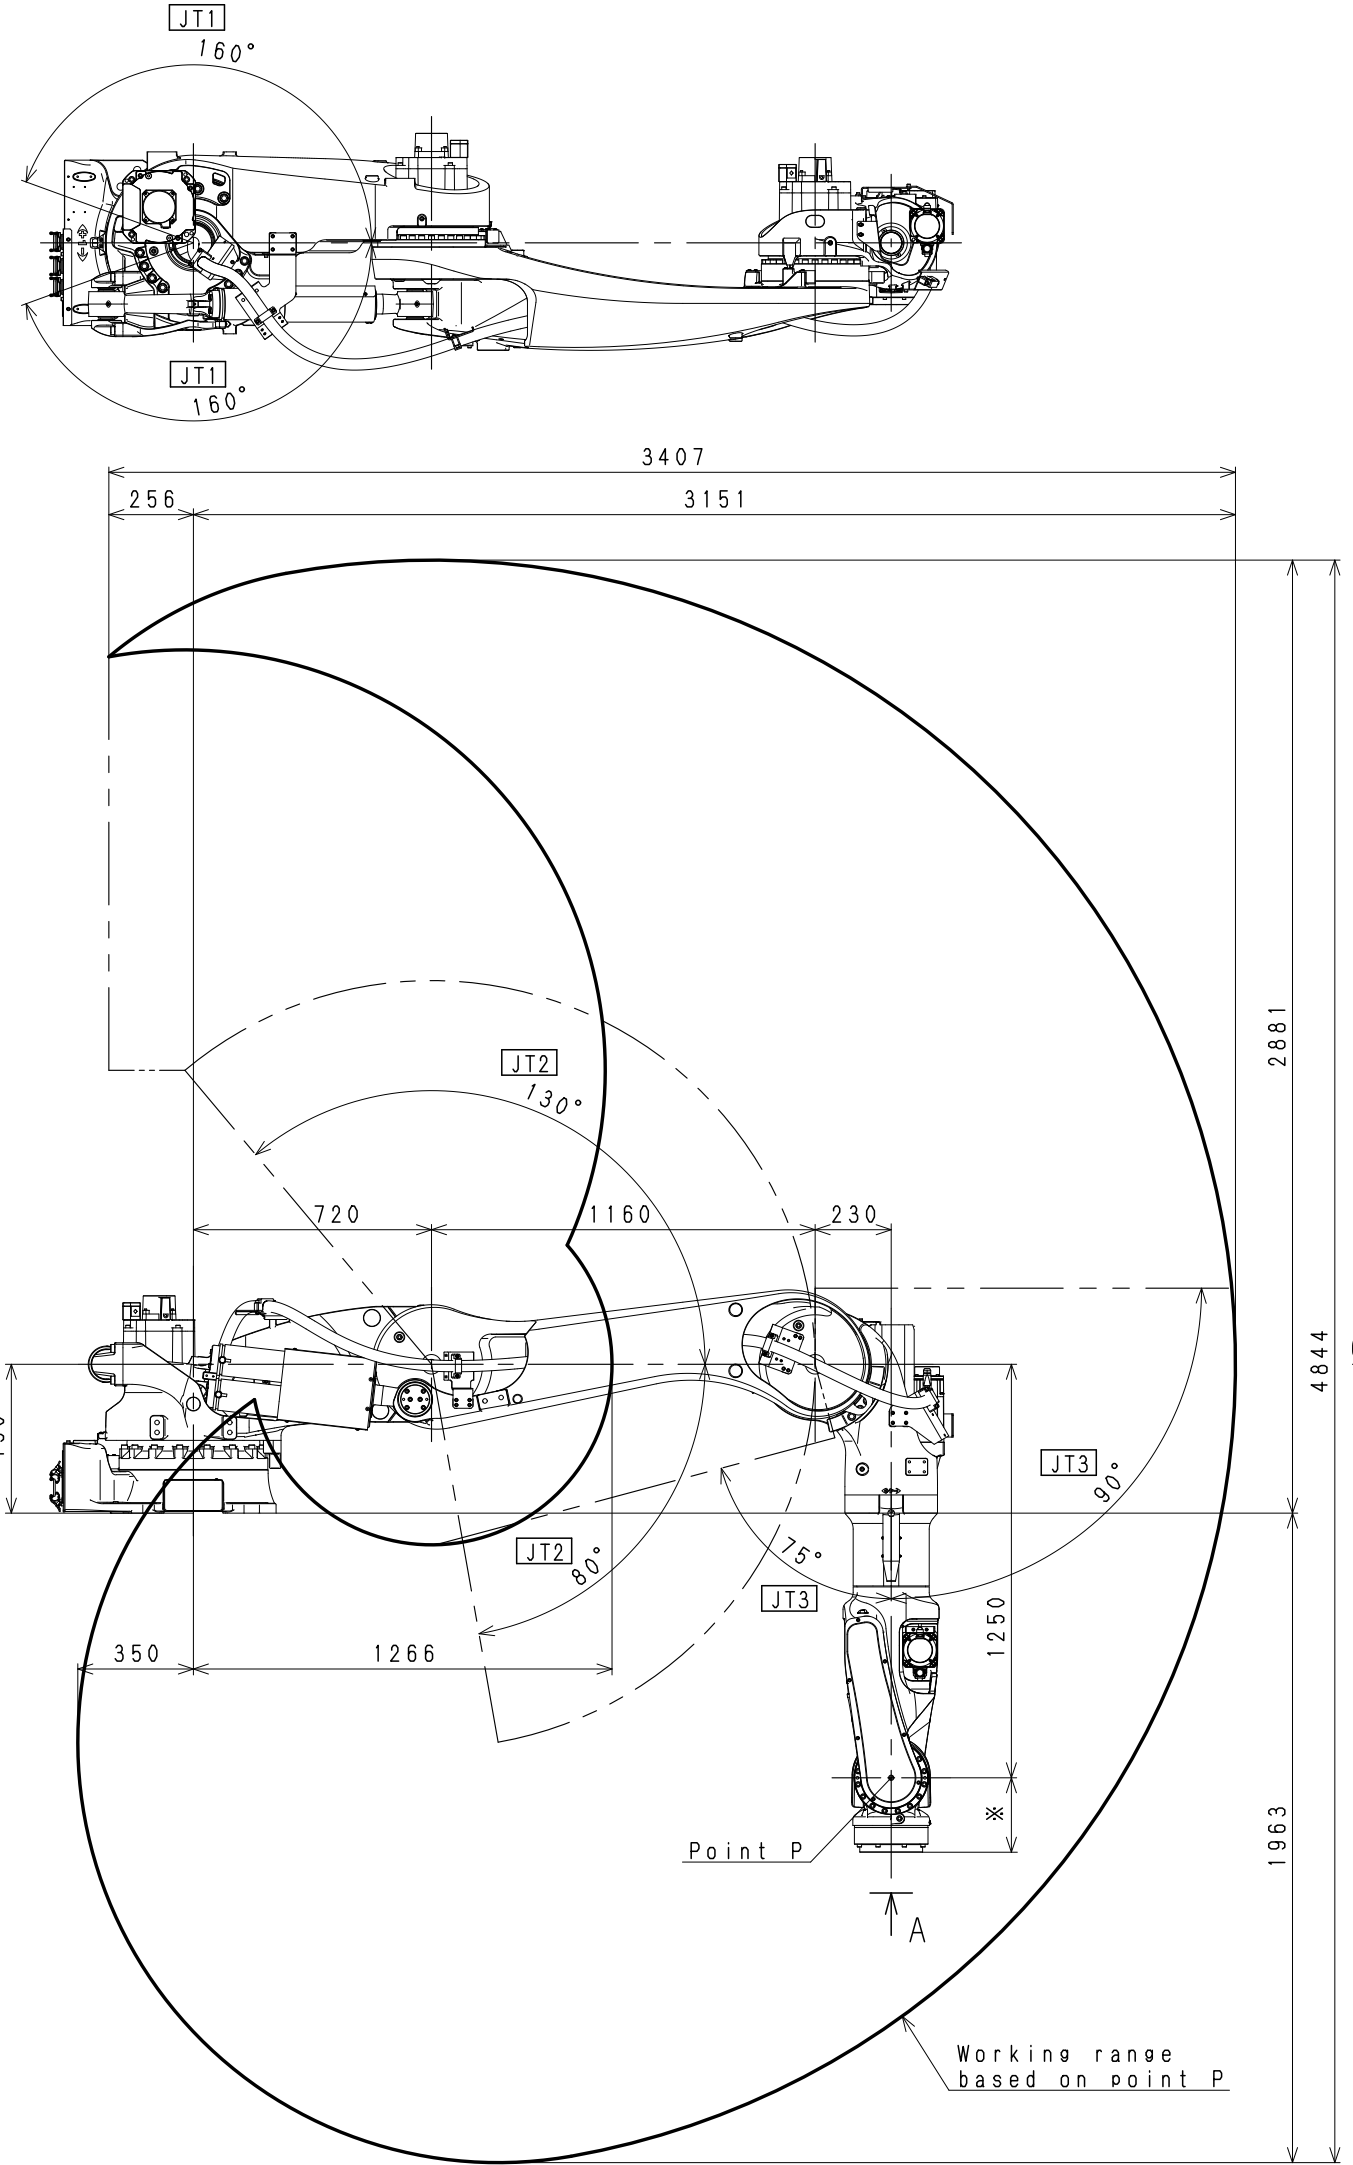

STANDARD FLANGE


※ Dimension: 225

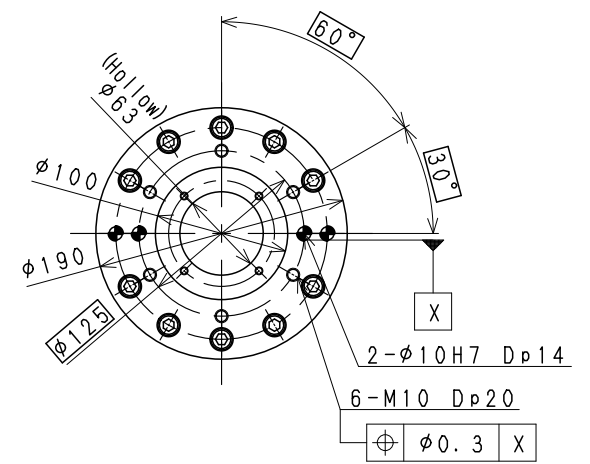


OPTION FLANGE

※ Dimension: 245

VIEW A

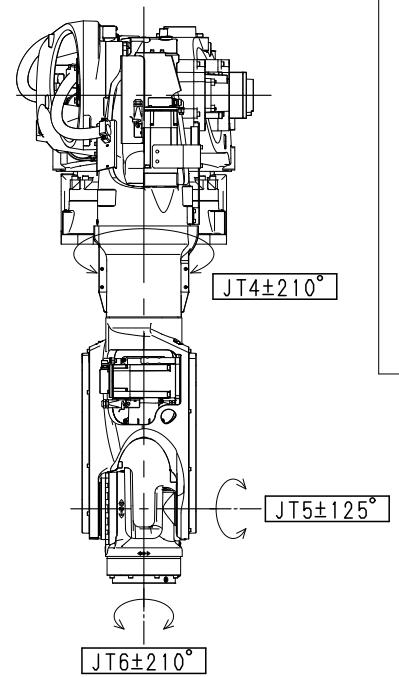


BT165L/200L
WORKING RANGE

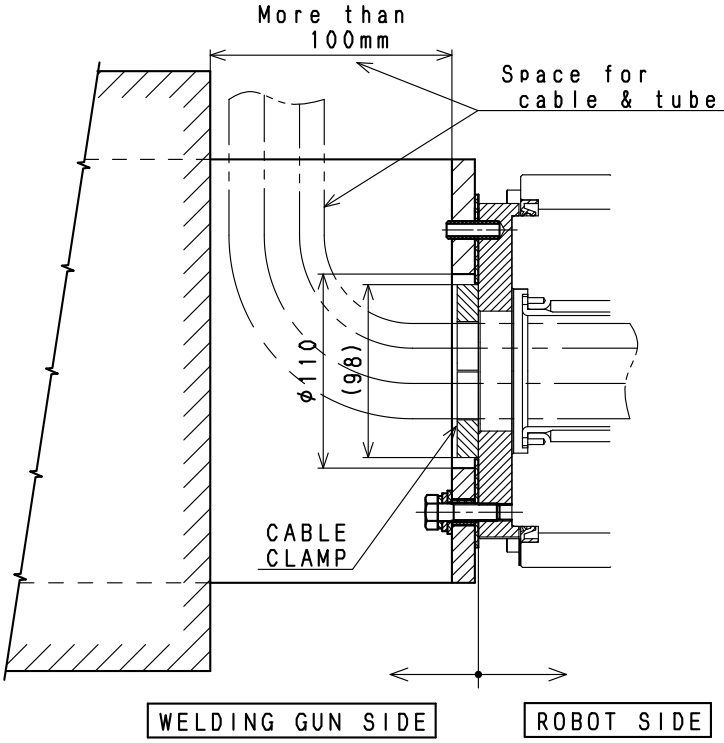

SECTION: A-A

NULL POSITION OF THE ROBOT

ロボット標準姿勢

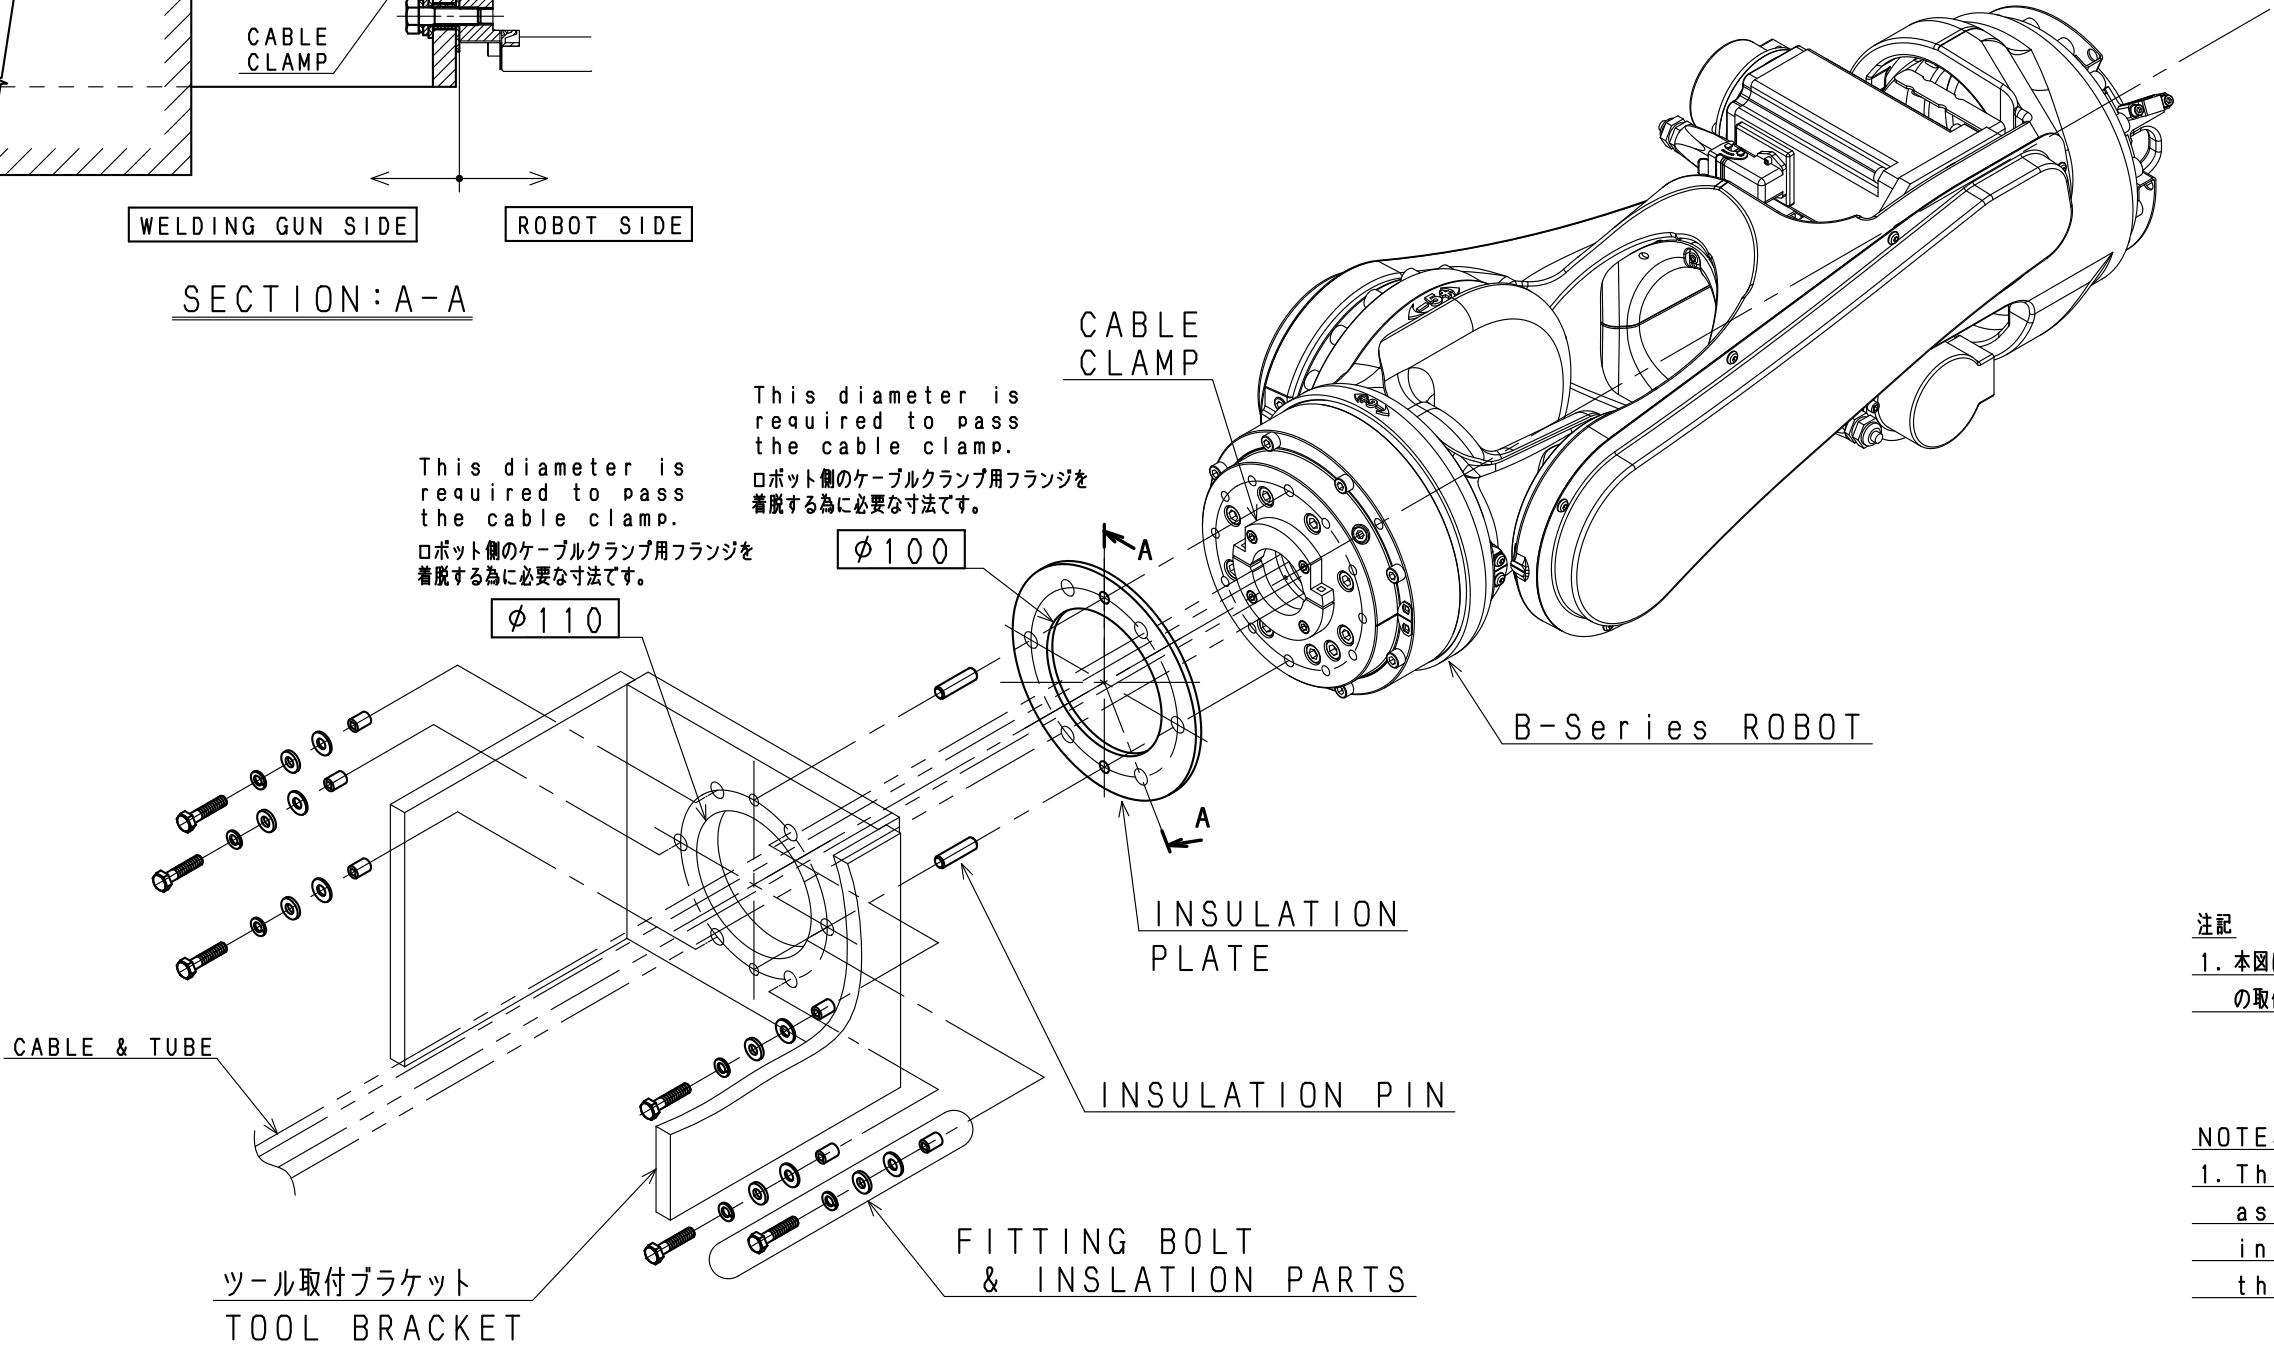

注記

1. 本図は、一例としてロボット手首へのツールの取付要領を示します。

NOTES

1. This figure shows as an example how to install a tool to the robot wrist.

B-Series ROBOT
TOOL INSTALLATION PROCEDURE
(ツール取付要領図)